

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 152 549 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
07.11.2001 Bulletin 2001/45

(51) Int Cl.7: **H04B 7/005**(21) Application number: **00303807.2**(22) Date of filing: **05.05.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(71) Applicant: **LUCENT TECHNOLOGIES INC.**  
**Murray Hill, New Jersey 07974-0636 (US)**

(72) Inventors:  
• **Luschi, Carlo**  
**Oxford, Oxfordshire OX2 0QT (GB)**

- **Kuzminskiy, Alexandr**  
**Swindon, Wiltshire SN5 9RB (GB)**
- **Strauch, Paul Edward**  
**Swindon, Wiltshire SN5 9BQ (GB)**
- **Yan, Ran-Hong**  
**Farrington, Oxon SN7 7SS (GB)**

(74) Representative: **Williams, David John et al**  
**Lucent Technologies UK Limited,**  
**5 Mornington Road**  
**Woodford Green, Essex IG8 0TU (GB)**

**(54) Radio communications systems**

(57) A mobile telephone system includes a base station which establishes a link with a selected mobile station. The received signal from the mobile station will include a noise component as well as a possible interference component from another mobile station operating at the same frequency in another cell.

The base station has a trellis based equalisation system which operates on the assumption that the re-

ceived signal includes components which have a predominantly Gaussian characteristic. A switch controller determines when the interference component (which is non-gaussian) in the received signal becomes a dominant component and operates to switch a spatio-temporal filter into the circuit instead of the trellis based equalisation system, to improve the bit error rate performance.

**EP 1 152 549 A1**

## D description

### Background of the Invention

#### Field of the Invention

[0001] The present invention relates to radio communication systems, in particular but not exclusively, to mobile radio communication systems.

#### Description of the Prior Art

[0002] Mobile radio communication systems involve an array of cells each served by a respective base station. Each base station communicates with various mobile stations located within its cell. Radio transmissions between a base station and a selected mobile station are subject to a variety of impairments. In time division multiple access (TDMA) cellular systems like GSM (global systems for mobile communications) or EDGE (enhanced data for GSM evolution), the received signal is distorted by the time varying multipath propagation channel which causes intersymbol interference. In addition, transmissions are impaired by thermal noise that results from both environmental noise and the noise generated by the circuitry of the receiver. Mobile station and base station radio receivers operate on one or more noisy and distorted waveforms as obtained by one or more receiver antennas. In order to extract the original transmitted data from the received waveforms, TDMA receivers employ equalisation systems which try to compensate for signal distortion and additive disturbances. Such equalisers operate on the basis that each signal burst includes a unique set of training symbols. Traditionally, TDMA cellular receivers employ trellis based receivers for one or more received signals. By using known training symbols transmitted within each burst, the trellis processor of the equalisation system is able to detect the transmitted payload from the noisy and distorted received signals. Conventionally, trellis equalisers operate on a maximum likelihood (ML) (see G D Forney Jr, "Maximum likelihood sequence estimation of digital sequences in the presence of intersymbol interference", IEEE Trans Inform Theory, vol IT-18, no 3, pp 363-378 May 1972) or a maximum a posteriori probability (MAP) (see L R Bahl, J Cocke, F Jelinek and J Raviv, "Optimal decoding of linear codes for maximising symbol error rate", IEEE Trans Inform Theory, Vol IT-20, pp 284-287, March 1974) criteria and operate optimally based on the assumption that the noise has a Gaussian distribution.

[0003] An additional problem arises in the presence of co-channel interference (CCI). To increase spectral efficiency, cellular radio systems usually employ frequency reuse. While the base stations of immediately adjacent cells operate at difference frequencies, the number of frequencies available is limited and so some cells further away operate at the same frequency. As the

cells become smaller they become closer together and so interference between cells increases, ie a base or mobile station in one cell receives not only a signal of frequency  $f$  from the mobile or base station with which a link has been established, but also an interference signal of frequency  $f$  from a mobile or base station in another cell operating at that same frequency. Because such interference signals are not Gaussian, the trellis based equalisation system requires a proper spatio-temporal model of the CCI. If, as is so often the case, the disturbance cannot be accurately modelled or the estimated, the trellis based equaliser becomes sub-optimum and experiences a significant performance degradation. Even when a suitable model for the CCI can be developed, the resulting receiver is often too complex to be efficiently implemented. In an interference limited scenario, spatio-temporal filtering techniques (see A M Kuzminskiy, C Luschi and P Strauch, "Comparison of linear and MISE spatio-temporal interference rejection combining with an antenna array in a GSM system" in Proc VTC 2000, Tokyo, Japan, May 2000) provide superior performance especially for multiple antenna receivers. However, such techniques perform poorly in noise limited scenarios.

[0004] Receivers for implementing a space-time filtering stage followed by a trellis processor have been proposed (see A J Paulraj and C B Papadias "Space-time processing for wireless communication" IEEE Signal Proc Mag, pp 40-84, November 1997). However, particularly in a software implementation of such an equaliser, this strategy will result in a significant increase in implementation complexity.

[0005] It is an object of the present invention to provide an improved radio communication system which is able to deal with both noise and interference disturbances in a more efficient and less costly manner.

#### Summary of the Invention

[0006] According to the present invention there is provided a cellular radio communication system comprising a plurality of cells each having a base station serving a plurality of mobile stations, at least one of said stations having a receiver for receiving a data signal and any accompanying noise propagated from the station with which a link has been established, and an interference signal propagated from a station in another cell, said at least one station having a trellis based equalisation system operative in a sense to detect transmitted data symbols from the accompanying disturbances in the distorted received signal, a spatio-temporal filter operative to process the received signal in a sense to minimise the signal distortion and the associated disturbances, and a switch responsive to predetermined criteria related to the value of the power of the noise signal relative to the value of the power of interference signal in the received signal to switch the received signal from the trellis based equalisation system to the spatio-temporal filter and vice

versa.

### Brief Description of the Drawings

[0007] A cellular radio communication systems embodying the present invention, will now be described, by way of example, with reference to the accompanying diagrammatic drawings, in which:

Figure 1 is a block diagram of the cellular radio communication system;

Figure 2 is a block diagram of part of the switch circuit of Figure 1; and

Figure 3 is a graph of bit error rate versus signal to noise ratio for the equaliser and spatio-temporal filter of Figure 1.

### Detailed Description of the Invention

[0008] The mobile radio communication system shown in Figure 1 includes a mobile station 2 communicating with the base station 4 of the cell in which the mobile station 2 is located. The base station 4 includes a plurality of independent differently sited antenna 6A to 6M (only two of the M antennas being shown namely 6A and 6M). Each antenna 6A to 6M feeds into the front end of its own receiver, shown collectively as receiver front end 8.

[0009] The output of each front end is fed via a respective switch 10 either to a respective trellis based equalisation system 12 or a respective spatio-temporal filter 14. The outputs of the spatio-temporal filters 14 are combined and fed to a deinterleaver 16 and the outputs of the trellis based equalisation systems 12 are combined and fed to the same deinterleaver 16. The output of deinterleaver 16 is fed to a channel decoder for decoding the information data.

[0010] In operation, the mobile station 2 will transmit a data signal 2 to the base station 4. The signal received by the base station will be the data signal accompanied by noise due to environmental conditions, reflections of the data signal due to the surrounding topography and interference from another mobile user 20 operating at the same frequency but in a remote cell. Added to this will be noise generated on the receiver itself resulting in the total equivalent noise indicated by way of a respective summing circuit 22A to 22M located between each antenna 6A to 6M and the front end 8 of the receiver.

[0011] The trellis based equalisation system, which may be a Viterbi ML or MAP equalisation, operates on the assumption that the total additive disturbance accompanying the data signal ie thermal noise, plus CCI have a Gaussian distribution. When the switch 10 is switched to the trellis based equalisation system 12, the system operates to provide optimum data detection in a typical noise limited scenario.

[0012] Interference from another mobile station however does not have a Gaussian distribution and so when

the interference reaches a particular level, the performance of the trellis based equalisation system starts to degrade. It is at this point that the switch 10 is switched to the spatio-temporal filter 14 which implements a linear or decision feedback filtering aimed at minimising a suitable cost function at its output (eg a least squares "LS" cost). In an interference limited scenario, this processing produces a lower bit error rate than could be achieved by the trellis based equalisation system.

[0013] In the case of the spatio-temporal filter 14, the filter acts to selectively weight the incoming signal at different points in time in a sense to minimise the effect of the interference on the training symbols and therefore on the payload within the data signal.

[0014] The switches 10 are operated by a switch controller 24 which monitors the received signals and operates the switches 10 in response to predetermined conditions existing in the received signals. The switching criteria is based on a determination of the relationship between the estimated power level of interference  $P_I$  and the estimated power level of noise  $P_N$  in the received signal consisting of the data signals, the noise signal N and interference signal I.

[0015] An example of a possible realisation of the switch controller 24 is shown in Figure 2. A processor 30 receives training symbols from a store 32 and the received signal (S+N+I) to reconstruct the original data signal S. A difference unit 34 receives the received signal (S+N+I) and subtracts from it the reconstructed original signal from the processor 30 to produce a difference signal consisting (N + I) of noise (N) and interference (I) only.

[0016] Noise and interference power  $P_N$  and  $P_I$  can thus be determined as well as the overall power  $P_S$  of the received signal.

[0017] Because the average noise power  $P_N$  is a receiver design parameter and remains generally constant and while the interference power will vary from burst to burst, it is possible to determine the values of  $P_N$  and  $P_I$  by relying on a knowledge of the thermal noise floor.

[0018] Given two preselected constants " $h_1$ " and " $h_2$ " which are prestored in a look-up-table based on a function of the estimated signal to noise ratio (SNR) or the estimated signal to interference ratio (SIR) the switching criteria under which the switch controller 34 operates is as follows.

[0019] If the estimated SNR is greater than SIR plus  $h_1$  dB, the switches 10 are switched to the spatio-temporal filter 14.

[0020] If the estimated SNR is less than SIR and plus  $h_2$  dB, then the switches 10 are switched to the trellis based equalisation system 12. The constants  $h_1$  and  $h_2$  may be fixed or a function of the estimated SNR or SIR. It will be understood that the rate can also be implemented in terms of  $P_N$  and  $P_I$  without needing to compute the quantities  $SNR = P_S/P_N$  and  $SIR = P_S/P_I$ .

[0021] In order to test the effectiveness of the algo-

rithm, a simulation was conducted using the values  $h_1 = h_2 = 5\text{dB}$ . The simulation was conducted using an EDGE (enhanced data for GSM evolution) receiver with two antennas. The interference was asynchronous with an SIR of 15dB. It was assumed that a typical urban propagation channel was used at a speed of 3 KM/h. The bit-error rate was plotted against SNR for the trellis equalisation system 12, for the spatio-temporal filter 14 and for the switched receiver. The results are shown in Figure 3 from which the benefits of the present invention can be appreciated.

[0022] While the base station has been described as having spatio-temporal filter, a trellis based equalisation system and a switch for switching between them, it will be appreciated that the same components can be incorporated into the mobile station instead or as well.

[0023] Also, while the base station has been described as having an array of antenna, it may have only a single antenna. While the mobile station has been described as having only a single antenna, it may have multiple antennas. While the use of multiple antennas generally increases the amount of circuitry used, the beneficial effects are that by combining the outputs of the different antenna, the data signal can be reinforced while the noise and interference signals can be combined in a manner to be self cancelling.

[0024] Changes may be made in the combination and arrangement of the elements as herein before set forth in the specification and shown in the drawings, it being understood that changes may be made in the embodiment disclosed without departing from the spirit and scope of the invention and defined in the following claims.

#### Claims

1. A cellular radio communication system comprising a plurality of cells each having a base station serving a plurality of mobile stations, at least one of said stations having a receiver for receiving a data signal and any accompanying noise propagated from the station with which a link has been established, and an interference signal propagated from a station in another cell, said at least one station having a trellis based equalisation system operative in a sense to detect transmitted data symbols from the accompanying disturbances in the distorted received signal, a spatio-temporal filter operative to process the received signal in a sense to minimise the signal distortion and the associated disturbances, and a switch responsive to predetermined criteria related to the value of the power of the noise signal relative to the value of the power of interference signal in the received signal to switch the received signal from the trellis based equalisation system to the spatio-temporal filter and vice versa.
2. A system according to Claim 1, wherein said at least one station comprises the base station.
3. A system according to Claim 1 or to Claim 2, wherein said at least one station includes an array of antennas and the receiver associated with said antennas operates in a manner to minimise the signal distortion and the effect of noise and interference signals.
4. A system according to any preceding claim, wherein said trellis based equalisation system operates on the basis that the data signal component of the received signals is impaired by intersymbol interference and additive Gaussian disturbances.
5. A system according to any preceding claim, wherein the predetermined criteria is the point at which the estimated signal to noise ratio in the received signal exceeds the estimated signal to interference ratio in the received signal by a predetermined amount.
6. A system according to Claim 5, wherein the predetermined amount is a function of signal to noise ratio SNR or signal to interference ratio SIR.
7. A system according to Claim 5, wherein the predetermined amount is  $h_1$  dB when the estimated SNR is greater than the estimated SIR and  $h_2$  dB when the estimated SNR is less than the estimated SIR and wherein  $h_1$  and  $h_2$  are variable constants.
8. A system according to Claim 7, wherein  $h_1 = h_2$ .
9. A system according to any preceding claim, wherein said at least one station includes a processor for estimating the power of the sum of the said noise and interference signals.
10. A system according to any one of Claims 1 to 8, wherein said at least one station includes a store for storing a unique set of training symbols, a processor for receiving the training symbols from the store and comparing them with training symbols in the received signal to reconstruct the data signal therefrom, and difference means for subtracting the reconstructed data signal from the received signal to provide a combined noise and interference signal from which the power of the noise relative to the power of the interference can be determined.
11. A radio communication system comprising a first radio station and a second radio station, at least one of said stations having a receiver for receiving a data signal and any accompanying noise propagated from the second station, and an interference signal propagated from another station, said at least one

of said first and second stations having a trellis based equalisation system operative in a sense to detect transmitted data symbols from the accompanying disturbances in the distorted received signal, a spatio-temporal filter operative to process the received signal in a sense to minimise the signal distortion and the associated disturbances, and a switch responsive to predetermined criteria related to the value of the power of the noise signal relative to the value of the power of interference signal in the received signal to switch the received signal from the trellis based equalisation system to the spatio-temporal filter and vice versa.

15

20

25

30

35

40

45

50

55

FIG. 1

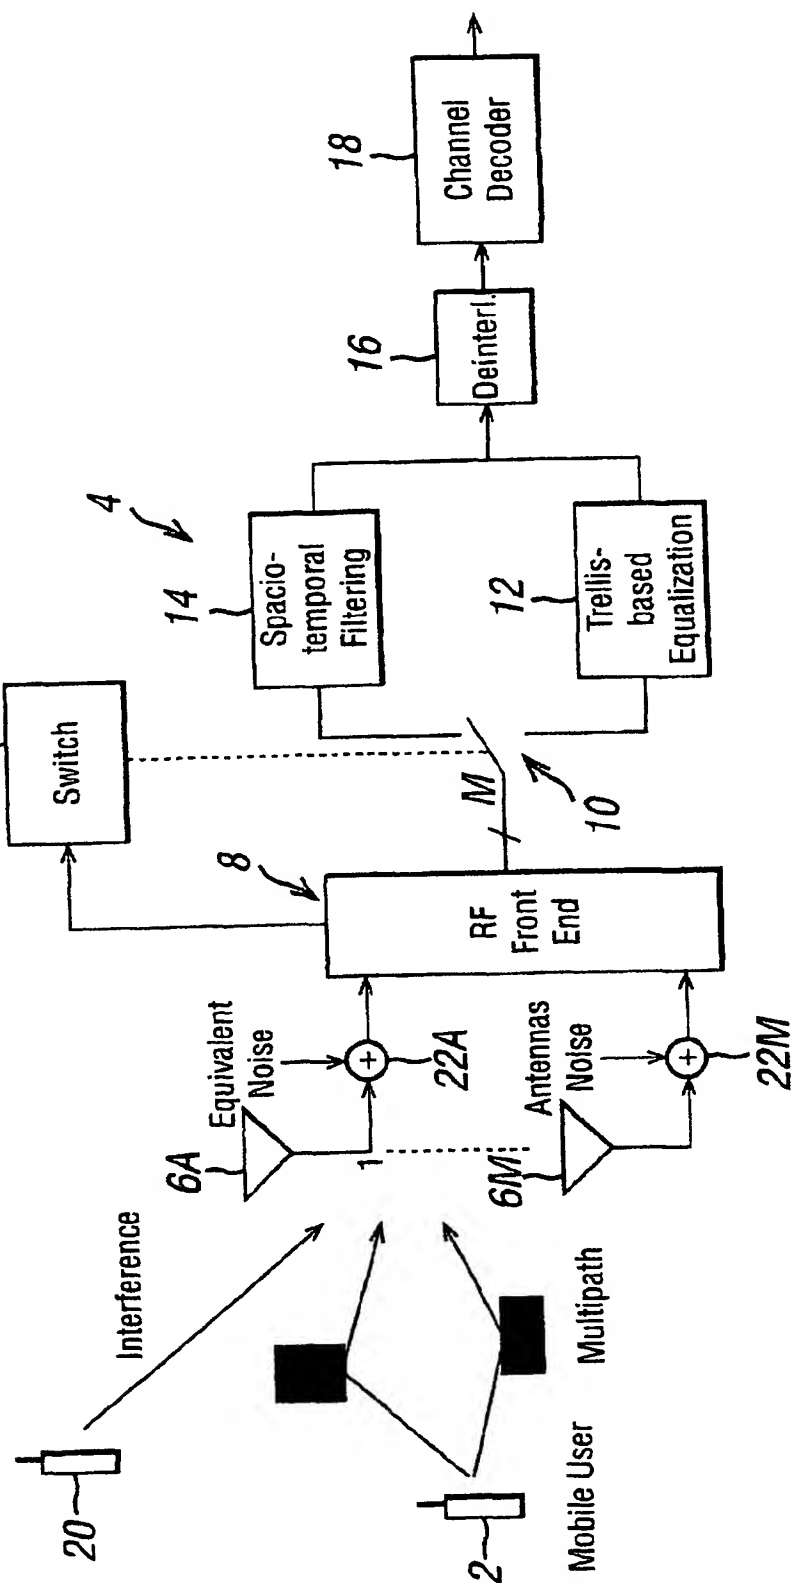


FIG. 2


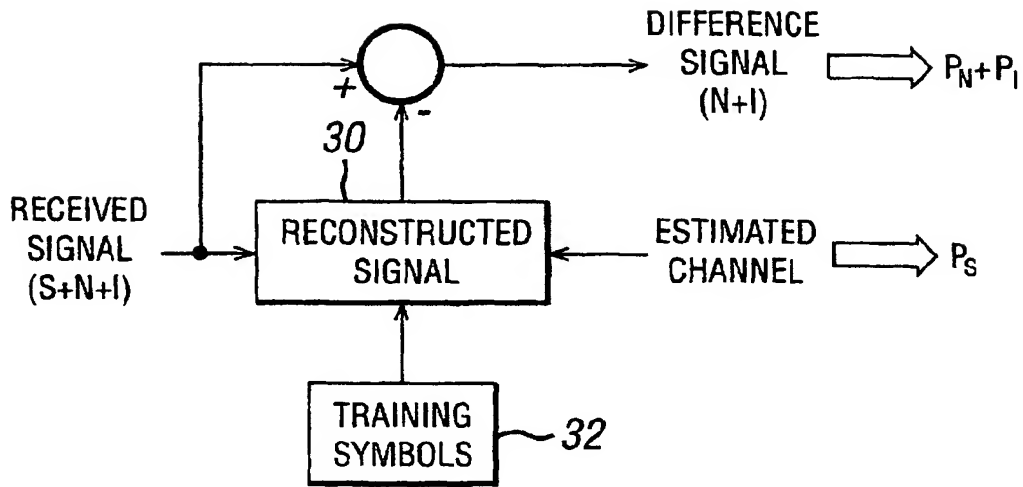


FIG. 3



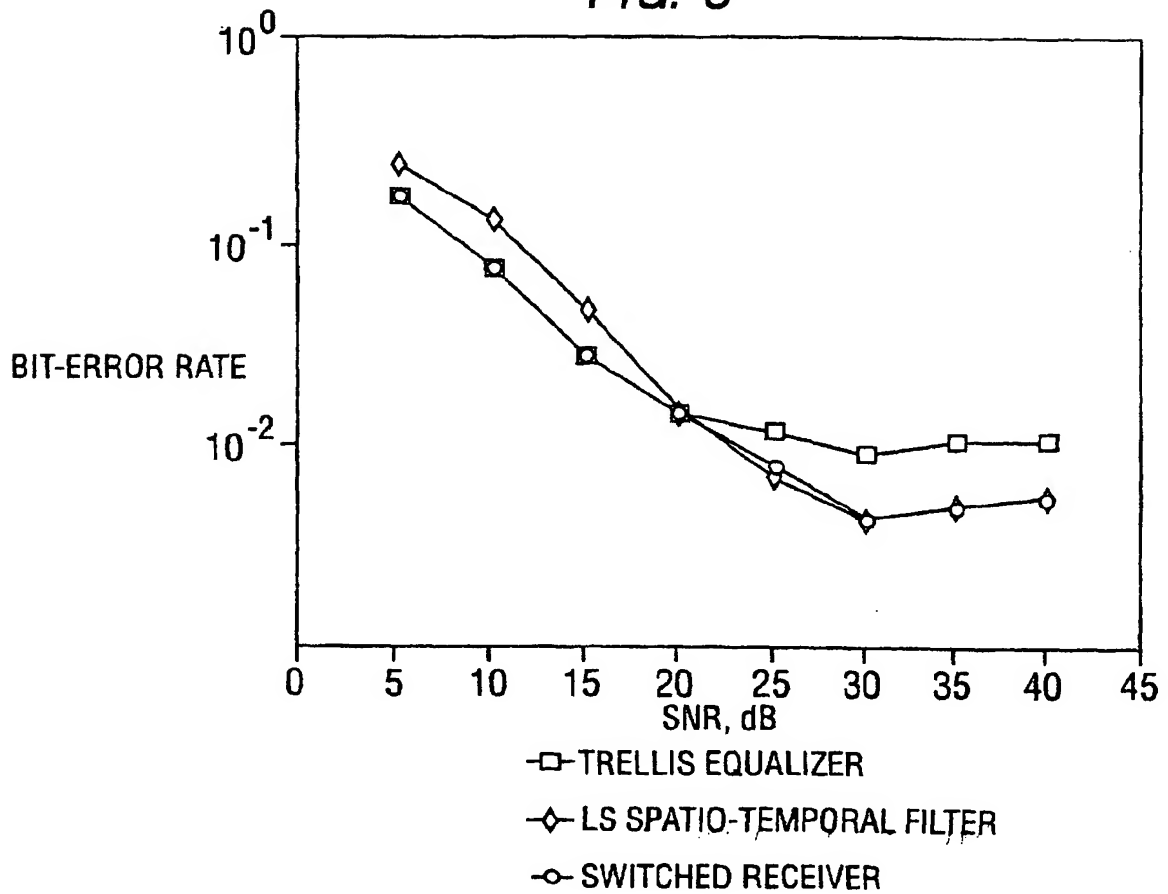

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 3807

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A,D	PAULRAJ A J, PAPADIAS C B: "SPACE-TIME PROCESSING FOR WIRELESS COMMUNICATIONS" IEEE SIGNAL PROCESSING MAGAZINE, vol. 14, no. 6, pages 49-83, XP000941658 * page 61, right-hand column, line 32 - page 63, left-hand column, line 30 * * page 65, left-hand column, line 46 - right-hand column, line 36 *	1,11	H04B7/005
A	WO 97 23061 A (THOMSON CSF ;PIPON FRANCOIS (FR); PIREZ DIDIER (FR); VILA PIERRE ( ) 26 June 1997 (1997-06-26) * page 7, line 1 - page 10, line 20; figure 2 *	1,11	
A	US 5 566 209 A (FORSSSEN ULF GOERAN ET AL) 15 October 1996 (1996-10-15) * column 4, line 9 - column 5, line 53; figures 5A,5B *	1,11	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04B H04L
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 7 December 2000	E-examiner Burghardt, G
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 3807

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-12-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9723061 A	26-06-1997	FR 2742619 A	20-06-1997
		AU 1100497 A	14-07-1997
		DE 69606433 D	02-03-2000
		DE 69606433 T	07-09-2000
		EP 0867079 A	30-09-1998
US 5566209 A	15-10-1996	AU 694175 B	16-07-1998
		AU 1723795 A	04-09-1995
		CA 2159712 A	24-08-1995
		CN 1124548 A	12-06-1996
		DE 69516338 D	25-05-2000
		EP 0693246 A	24-01-1996
		FI 954806 A	09-10-1995
		JP 8511394 T	26-11-1996
		WO 9522873 A	24-08-1995
		SG 48507 A	17-04-1998

EPO FORM P0455

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

